V-Tune Pro HD

The V-Tune Pro HD delivers a total tuning solution for any integrated system, whether it requires legacy NTSC tuning or ATSC/QAM capability. V-Tune Pro HD is also LAN addressable and IPTV ready, capable of decoding MPEG2, MPEG4, and H.264.

As with all Aurora Multimedia products, the V-Tune Pro HD is absolutely integrator-friendly. Intuitive RS-232 command sets provide reliable 2-way communication via traditional control systems, but it also provides IP-based control for networked arrays of these units. A host of video output ports includes composite video, S-Video, component video, and HDMI. Audio is supported with both unbalanced RCA connections and SPDIF coaxial digital audio. An optional hard drive playback feature is also available for digital signage and other applications. The V-Tune Pro HD defines versatility as it can be fit into nearly any integrated system typology.

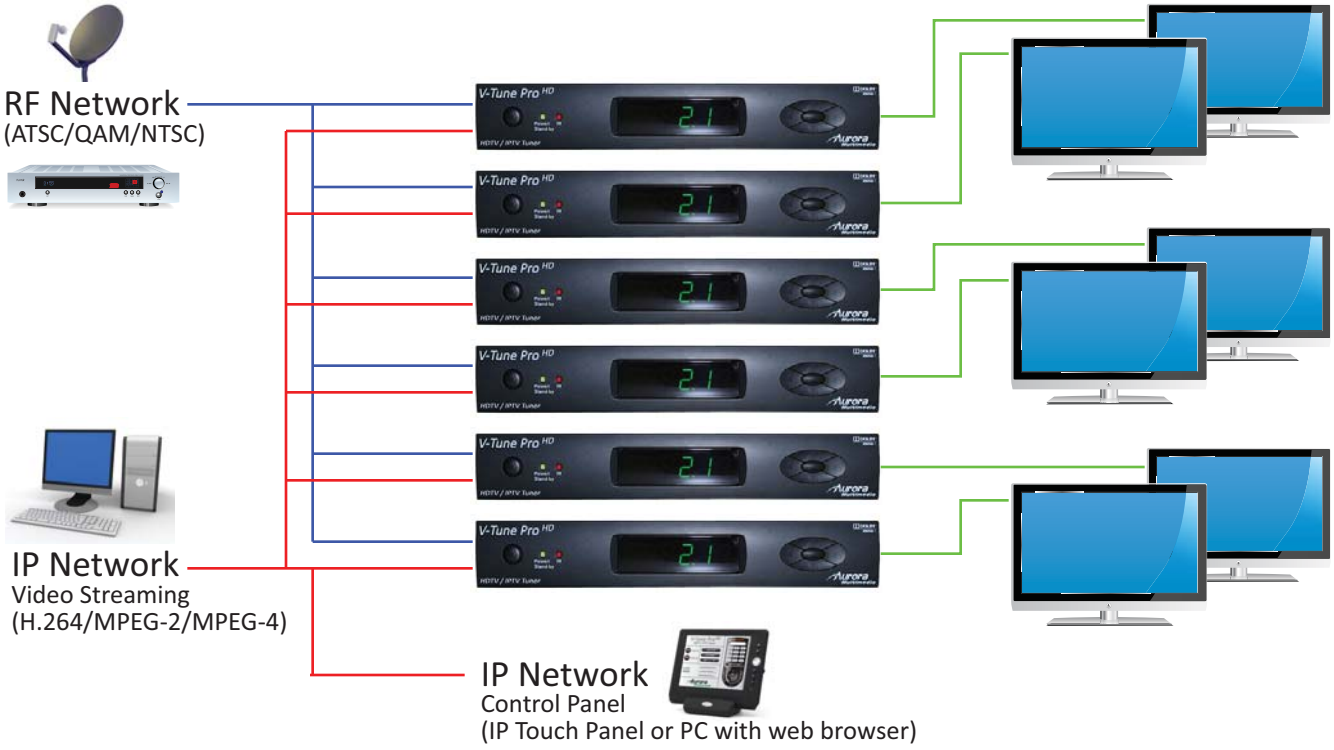

For more information on this and other products, please visit **www.auroramultimedia.com**

Aurora Multimedia

IP Control Systems, Multi-Image Video Processors, DVI and HDMI Distribution...

205 Commercial Court
Morganville, NJ 07751
(732) 591-5800
sales@auroramultimedia.com

V-Tune Pro HD

HDMI HIGH-DEFINITION MULTIMEDIA INTERFACE | DOLBY DIGITAL | RoHS Compliant Directive 2002/95/EC

Specifications

Video	
RF Input	ATSC / QAM / NTSC signal reception
IP Stream Formats	H.264 MPEG-2 MPEG-4
Decoding Specifications	MPEG-2 "MP@HL" and "MP@ML" decoder H.264/AVC main and high profile to level 4.1 VC-1 advanced profile @ level 3 VC-1 simple and main profile MPEG-4 Part 2 Simple profile @ Level 4 MPEG-4 Part 2 Advanced Simple profile @ Level 5 (SD only)
Aspect Ratio	16:9 / 4:3
Video Outputs	HDMI 1.3a HDCP YPbPr S-Video Composite Video
Display Compatibility	Compatible with HDTV, EDTV and SDTV display
Other Features	Closed captioning V-Chip support Automatic or manual channel scan USB port for firmware upgrade
Audio	
Connectors	Stereo RCA S/PDIF Coaxial S/PDIF Optical
Control	
Control Methods	RS-232 LAN Control (RPC calls via HTTP POST)
Connectors	TRS (RS-232) RJ-45 Jack (LAN)
Physical	
Dimensions (WxDxH)	10.63 x 7 x 1.75 inches
Weight	2.4 lbs. (V-Tune Pro HD only) 5 lbs. (Shipping weight)

Built in IP control page

On screen display

Rear Panel

①. DC IN
②. RF IN
③. RS-232
④. IR IN
⑤. YPbPr/S-VIDEO/ VIDEO w/ AUDIO OUT
⑥. S/PDIF OUT
⑦. HDMI OUT
⑧. LAN
⑨. USB

Included Accessories

- 12v DC power supply
- IRC-15 IR remote control
- (2) AAA batteries
- YPbPr video cable
- Stereo audio cable
- V-Tune Pro HD user manual

For more information on this and other products, please visit **www.auroramultimedia.com**

Aurora Multimedia

IP Control Systems, Multi-Image Video Processors, DVI and HDMI Distribution...

205 Commercial Court
Morganville, NJ 07751
(732) 591-5800
sales@auroramultimedia.com